


NORMAFIX® BS

Fixing clips

NORMAFIX® BS fixing clips enable pipes, cables and cable protection pipes to be attached to structures quickly and easily. They are suitable for all industrial applications which require a low-priced yet reliable attachment solution.

- 1 Sturdy band design and precise fit
- 2 Components are retained securely and with ease

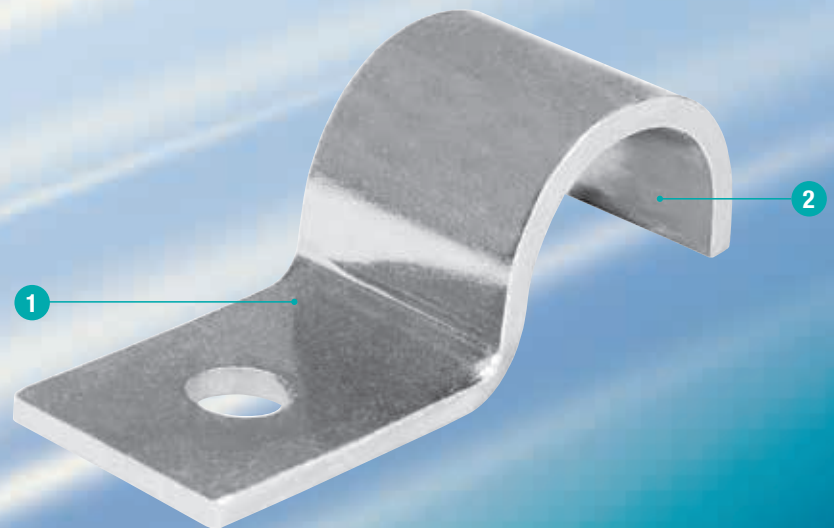

Advantages at a glance

- Safe fixation
- Easy to handle
- Chrome 6 free surface

Applications

- Machine building
- White goods
- Chemical industry
- Irrigation systems
- Agricultural machines
- Engine manufacturing

Materials

W1	W2	W3	W4	W5
x				

Other materials available on request.

Versions

Fixing clips in accordance with DIN Light range (BSL)

Band widths: 10 and 12 mm

Material thicknesses: 1 and 1.5 mm



Fixing clips Standard range (BSN)

Band widths: 20 mm

Material thicknesses: 2 mm



Fixing clips in accordance with DIN Heavy-duty range (BSS)

Band widths: 25 mm

Material thicknesses: 3 mm



Pipe clips in accordance with DIN

Band widths: 16–40 mm


Material thicknesses: 1.5–4 mm



NORMAFIX® BSL

BSL type 510

In accordance with
DIN 72571 for 1 line



Order code:


BSL 1x Ø DIN 72571

NORMAFIX® BSL type 510

Diameter Ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
4	18	9	10	4.8	1
5	18.5	9	10	4.8	1
6	20	10	10	4.8	1
7	20.5	10	10	4.8	1
8	22	11	10	4.8	1
9	22.5	11	10	4.8	1
10	23	11	10	4.8	1
11	30	15	12	5.8	1.5
12	30.5	16	12	5.8	1.5
15	34	18	12	5.8	1.5
16	35	18	12	5.8	1.5
18	35.5	18	12	7	1.5
20	37.5	19	12	7	1.5
22	39.5	20	12	7	1.5
24	41.5	21	12	7	1.5

BSL type 510

In accordance with
DIN 72571 for 2 lines



Order code:


BSL 2x Ø DIN 72571

NORMAFIX® BSL type 510

Diameter Ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
4	22.5	11	10	4.8	1
5	24	11.5	10	4.8	1
6	26.5	13	10	4.8	1
7	28	13.5	10	4.8	1
8	30.5	15	10	4.8	1
10	33.5	16	10	4.8	1
12	43	22	12	5.8	1.5
15	49	25.3	12	5.8	1.5

BSL type 512

In accordance with
DIN 72573 for 1 line



Order code:

BSL 1x Ø DIN 72573


NORMAFIX® BSL type 512

Diameter Ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
4	29	17	10	4.8	1
5	30	18	10	4.8	1
6	32	20	10	4.8	1
7	32	20	10	4.8	1
8	34	22	10	4.8	1
10	34	22	10	4.8	1
12	46	32	12	5.8	1.5
15	50	36	12	5.8	1.5
18	50	36	12	7	1.5
20	52	38	12	7	1.5
22	54	40	12	7	1.5

NORMAFIX® BSL

BSL type 512

In accordance with
DIN 72573 for 2 lines



Order code:


BSL 2x \emptyset DIN 72573

NORMAFIX® BSL type 512

Diameter \emptyset	l_1	l_2	Band width mm b	Bore hole mm d	Material thickness mm s
4	33	21	10	4.8	1
5	35	23	10	4.8	1
6	38	26	10	4.8	1
7	39	27	10	4.8	1
8	42	30	10	4.8	1
10	44	32	10	4.8	1
12	58	44	12	5.8	1.5
15	66	52	12	5.8	1.5
18	69	55	12	7	1.5
20	73	59	12	7	1.5
22	77	63	12	7	1.5

BSL type 512

In accordance with
DIN 72573 for 3 lines



Order code:


BSL 3x \emptyset DIN 72573

NORMAFIX® BSL type 512

Diameter \emptyset	l_1	l_2	Band width mm b	Bore hole mm d	Material thickness mm s
4	39	27	10	4.8	1
5	41	29	10	4.8	1
6	45	33	10	4.8	1
7	47	35	10	4.8	1
8	51	39	10	4.8	1
10	55	43	10	4.8	1
12	71	57	12	5.8	1.5
15	81	67	12	5.8	1.5
18	87	73	12	7	1.5
20	93	79	12	7	1.5
22	99	85	12	7	1.5

BSL type 512

In accordance with
DIN 72573 for 4 lines



Order code:

BSL 4x \emptyset DIN 72573


NORMAFIX® BSL type 512

Diameter \emptyset	l_1	l_2	Band width mm b	Bore hole mm d	Material thickness mm s
4	44	32	10	4.8	1
5	46	34	10	4.8	1
6	51	39	10	4.8	1
7	54	42	10	4.8	1
8	59	47	10	4.8	1
10	67	55	10	4.8	1
12	83	69	12	5.8	1.5
15	95	81	12	5.8	1.5
18	105	91	12	7	1.5

NORMAFIX® BSL

BSL type 512

In accordance with
DIN 72573 for 5 lines



Order code:


BSL 5x ø DIN 72573

NORMAFIX® BSL type 512

Diameter ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
4	48	36	10	4.8	1
5	53	41	10	4.8	1
6	57	45	10	4.8	1
7	63	51	10	4.8	1
8	68	56	10	4.8	1
10	77	65	10	4.8	1
12	95	81	12	5.8	1.5

BSL type 512

In accordance with
DIN 72573 for 6 lines



Order code:

BSL 6x ø DIN 72573


NORMAFIX® BSL type 512

Diameter ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
4	52	40	10	4.8	1
5	58	46	10	4.8	1
6	64	52	10	4.8	1
7	72	60	10	4.8	1
8	76	64	10	4.8	1
10	90	78	10	4.8	1

NORMAFIX® BSN

BSN type 520

for 1 line




Order code:
BSN Ø x20x2

NORMAFIX® BSN type 520

Diameter Ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
8	26	16.5	20	7	2
9	26.5	17	20	7	2
10	26.5	17	20	7	2
12	28	18	20	7	2
13	28.5	19	20	7	2
15	28.5	19	20	7	2
18	30	21.5	20	7	2
19	30.5	22	20	7	2
20	32	22.5	20	7	2
22	35	23.5	20	7	2
23	35.5	25.5	20	7	2
27	37.5	27.5	20	7	2

BSN type 521

for 1 line




Order code:
BSN Ø x20x2 two-lug
version

NORMAFIX® BSN type 521

Diameter Ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
7	44	28	20	7	2
9	48	32	20	7	2
10	49	33	20	7	2
11	50	34	20	7	2
12	51	35	20	7	2
13	53	37	20	7	2
15	56	40	20	7	2
18	59	43	20	7	2
19	60.5	44.5	20	7	2
20	65	49	20	7	2
22	67	51	20	7	2
23	68	52	20	7	2
26	68	52	20	7	2

BSN type 522

for 2 lines



Order code:
BSN 2x Ø x20x2


NORMAFIX® BSN type 522

Diameter Ø	a	Band width mm b	Bore hole mm d	Material thickness mm s
9	26	20	7	2
10	28	20	7	2
12	32	20	7	2
13	34	20	7	2
15	38	20	7	2
18	44	20	7	2
19	46	20	7	2
20	48	20	7	2
22	52	20	7	2

NORMAFIX® BSS

BSS type 530

for 1 line



Order code:


BSS ø x25x3

NORMAFIX® BSS type 530

Diameter ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
10	28	18.5	25	9	3
12	39	24	25	9	3
13	39.5	24.5	25	9	3
15	40.5	25.5	25	9	3
18	42	28	25	9	3
19	43.5	29	25	9	3
20	44	29.5	25	9	3
22	44	29.5	25	9	3
23	44.5	30	25	9	3
26	52	36	25	9	3
28.5	52	36	25	9	3
31	56	40	25	9	3
36	58	41.5	25	9	3
39	58.5	42	25	9	3
43	70	50	25	9	3

BSS type 531

for 1 line



Order code:


BSS ø x25x3 two-lug version

NORMAFIX® BSS type 531

Diameter ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
10	49	33	25	9	3
12	50	34	25	9	3
13	52	36	25	9	3
15	55	39	25	9	3
18	58	42	25	9	3
19	60	44	25	9	3
20	65	49	25	9	3
22	69	53	25	9	3
23	82	56	25	9	3
26	84	58	25	9	3
28.5	89	63	25	9	3
31	90	64	25	9	3
36	106	80	25	9	3
39	110	84	25	9	3
43	115	89	25	9	3

BSS type 532

for 2 lines



Order code:

BSS 2x ø x25x3


NORMAFIX® BSS type 532

Diameter ø	a	Band width mm b	Bore hole mm d	Material thickness mm s
10	30	25	9	3
12	34	25	9	3
13	36	25	9	3
15	40	25	9	3
18	46	25	9	3
20	50	25	9	3
22	54	25	9	3
23	56	25	9	3
26	62	25	9	3

NORMAFIX® PIPE CLIPS

Pipe clip type 540

In accordance with
DIN 1596 for 1 line



Order code:


Pipe clip ø DIN 1596

NORMAFIX® Pipe clip type 540

Diameter ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
7	26	14	16	6.6	2
9	28	16	16	6.6	2
13	30	18	20	6.6	2
15.5	32	20	20	6.6	2
19	34	22	20	6.6	2
23	43	28	25	9	3
26	44	29	25	9	3
28.5	47	32	25	9	3
31	47	32	25	9	3
33	56	36	25	9	3
36	57	40	30	11	3
39	59	42	30	11	3
43	61	44	30	11	3
46	62	45	30	11	3
49	67	48	40	14	4
52	72	53	40	14	4
58	74	55	40	14	4
61	77	58	40	14	4

Pipe clip type 541

In accordance with
DIN 1597 for 1 line



Order code:

Pipe clip ø DIN 1597

NORMAFIX® Pipe clip type 541

Diameter ø	l ₁	l ₂	Band width mm b	Bore hole mm d	Material thickness mm s
7	44	28	16	5.5	1.5
9	48	32	16	5.5	1.5
13	52	36	16	5.5	1.5
15.5	56	40	16	5.5	1.5
19	60	44	16	5.5	1.5
23	76	56	20	6.6	2
26	78	58	20	6.6	2
28.5	84	64	20	6.6	2
31	84	64	20	6.6	2
33	92	72	20	6.6	2
36	104	80	25	9	3
39	108	84	25	9	3
43	112	88	25	9	3
46	114	90	25	9	3
49	118	90	30	11	3
52	134	106	30	11	3
58	138	110	30	11	3
61	138	110	30	11	3



NORMA Group

Postfach 11 49 · D-63461 Maintal
Edisonstraße 4 · D-63477 Maintal

Tel: +49 (61 81) 4 03-0
Fax: +49 (61 81) 4 03-210

www.normagroup.com
info@normagroup.com

This datasheet supersedes all previous issues. No part of this publication may be reproduced without our prior written consent. In NORMA Group's policy of continual product improvements to meet user needs and technological developments, all models and sets listed in this folder (photographs, specifications, sizes and weights) may be upgraded or discontinued without notice and without any obligation on our part to modify tools or equipment sold previously. The recommendations for use and safety given in this folder do not replace accepted good practice or the safety related legal and regulatory provisions. References to standards implemented at 01/02/2012 are not contractually binding.